

SEPTIC TANK LDPE

For water contaminated with faecal matter


PRODUCT DESCRIPTION

ESEP LDPE "septic tank", series **FS 9000, 4000-6000 I**. For placement under or above ground. Equipped with one screw on cover \varnothing 480 mm. Not suitable for traffic loads. Warning: it is important that the installation instructions are strictly followed.

APPLICATIONS

Systems with purification class I are used in the filtration of domestic waste water in places where no higher degree of purification than class I is required. After treatment the waste water can be led to the surface water. Unfiltered disposal of domestic waste water is not allowed.

DRAWING

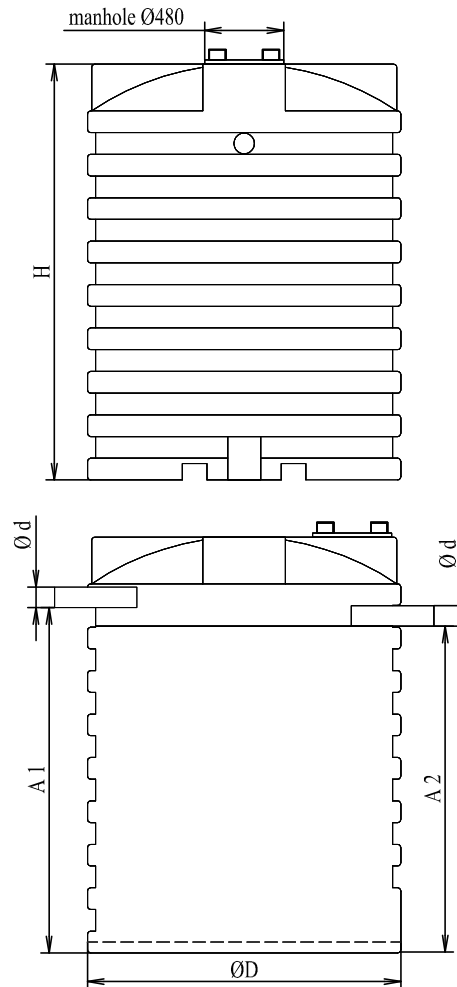

KWALITEIT

- Not suitable for traffic loads. Follow the installation instructions strictly
- The FS 9000 series are made from LDPE (polyethylene), using rotational moulding
- CE certified

SPECIFICATIONS

Type	I*	Ø D	A1	A2	Ød	Kg.	H
FS 9040	4000	1900	1600	1570	125	160	1860
FS 9050	5000	1900	1950	1880	125	180	2260
FS 9060	6000	1900	2100	2050	125	200	2520

I* = Volume of septic tank (litres).

** N.B. during installation extra precautions have to be made! Follow the installation instructions strictly!