

## NON-RETURN VALVES series ERK-R-O

**Prevents backflow**

### PRODUCT DESCRIPTION

**ESEP** non-return valve used for surface water, sewers and other aggressive environments, **series ERK-R-O**. Suitable for mounting on a flat surface wall. Entirely fabricated out of HDPE, axle and ballast weight AISI 316. EPDM rubber seal in between lid and housing and EPDM rubber seal in between wall and valve. Mounting by means of chemical anchors or mould in anchors.


### APPLICATIONS

The non-return valve is used in surface water, sewers, disposal systems with a pump and other aggressive environments where return flow needs to be prevented.

### QUALITY

- Suitable for mounting on a flat wall
- Entirely fabricated out of HDPE, axle and ballast weight AISI 316
- EPDM rubber seal in between lid and housing, housing and wall
- Mounting by chemical anchors or mould in anchors
- The valve has a maximal operating pressure of 5 mWC

### DRAWING\*

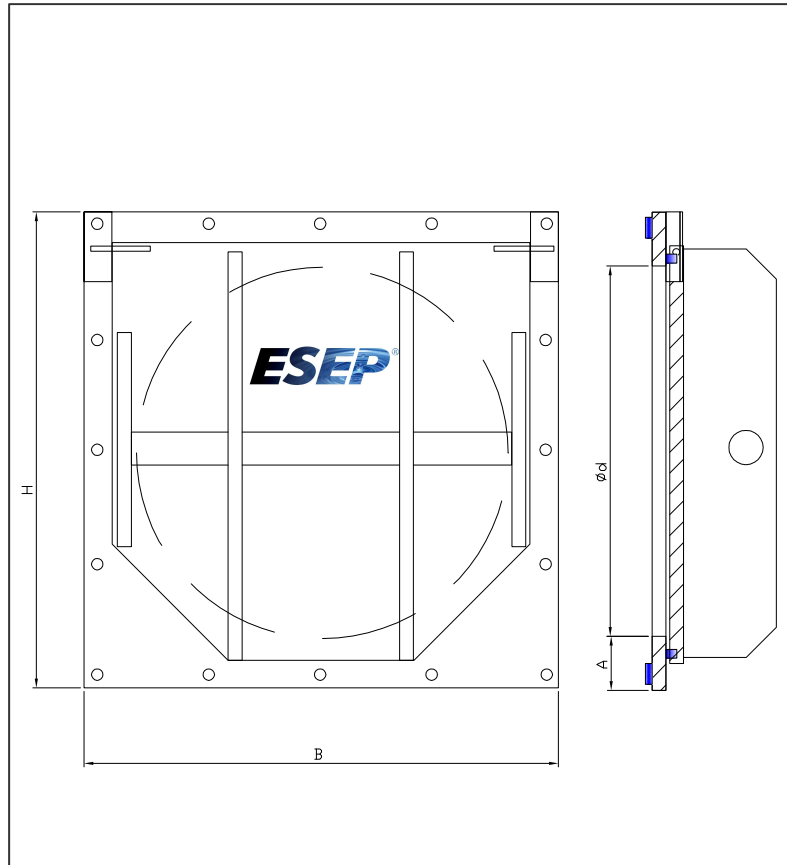

### SPECIFICATIONS

Type	Ø d*	A*	B	H	Kg.
ERK-R-O 150	160	40	240	270	2
ERK-R-O 200	200	40	280	310	3
ERK-R-O 250	250	40	330	360	5
ERK-R-O 300	315	40	395	425	6
ERK-R-O 400	400	40	480	510	10
ERK-R-O 500	500	40	580	610	15
ERK-R-O 600	600	100	840	840	35
ERK-R-O 700	700	100	940	940	50
ERK-R-O 800	800	100	1040	1000	65
ERK-R-O 900	900	100	1140	1100	75
ERK-R-O 1000	1000	100	1240	1200	90
ERK-R-O 1200	1200	100	1440	1400	110

A\* = Distance to flow line

Ø d\* = Bore diameter

Drawing\* = Principal drawing

Other dimensions and special editions on request.